# **AIDARY**

User manual
Heat Press Machine

**AP2235** 

### **HEAT PRESS MACHINE**



# **User Manual**


# Introduction

A heat press machine is using temperature and pressure with a certain amount of time to transfer images on items, the transfer is permanently embedded into the product.

# **Package Contents**


- 1 x Heat Press Machine
- 1 x Power cord
- 1 x User Manual

#### PRODUCT PARAMETERS

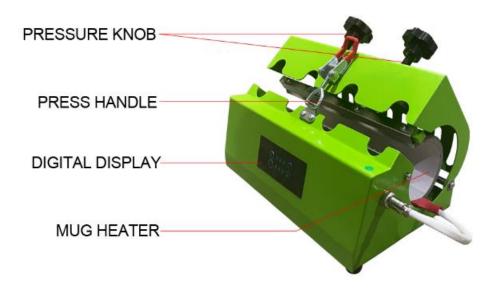

# 1.Printing Methods

- Make sure the power plug is well connected to the wall socket, then press the On/Off button to turn on.
- 2. Set the temperature and the time you want:

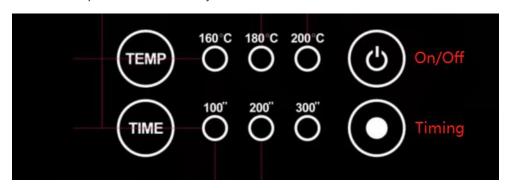

- A: Press TEMP button to set the temperature.
- B: Press TIME button to set the time.
- 3. The buzzer will sound when the temperature reaches the setting temperature, adjust the pressure knob, place the mug into mug heater.
- 4. Close the handle and start to transfer, press the Timing button to start counting down.
- 5. The buzzer will sound again when the scheduled time is up, then press the Timing button again to stop, and open the handle, the transfer work is finished.

# 2.Recommended Setting for the Object

SURFACE	PRESS TIME	TEMPERATURE	PRESSURE	TIPS
Ceramic mug	200-250 seconds	180°C-200°C	40 PSI (Medium)	With sublimation paper
Plastic mug	50-60 seconds	180°C-200°C	40 PSI (Medium)	With sublimation paper
Metal mug	40-50 seconds	165°C-175°C	40 PSI (Medium)	With sublimation paper

These are approximate datas FYI

# 3.Warning:

- Different item will require different temperature and time setting because the materials or thickness is different.
- 2. This machine is not suitable for children to use or for food processing.
- 3. Please turn off the machine and unplug the power cord when the machine is not in use.

#### 4. Maintain Note:

- 1. We don't recommend setting temperature more than 180 °C/482 F.
- 2. DO NOT HEAT WITHOUT A MUG IN THE MUG HEATER!
- 3. Apply appropriate pressure, do not apply too much pressure.
- 4. The difference between the height of mug and the length of the mug heater should be less than 2CM.

# 5.Troubleshooting:

#### No action after turn on the machine.

- 1. Check the plug whether it connects well or whether it is broken.
- 2. Check the fuse whether it has been burnt out.
- 3. Check the power switch or digital controller whether it is broken.

#### Indicating light is on but the display screen is black.

Check the 5 cable of railway transformer. The connection is poor if it is loose, just fix it. The transformer may be faulty if the cable is well connected just fix it.

#### The display screen is working well but the temperature is not heating up.

- 1. Check if the indicating light of solid-state relay is on, if not, please check whether the relay or digital controller is broken.
- The heat platen still can't heating up if you already changed the new solid-state relay, please check whether the heat plate is faulty or the heat plate's power cable is loose, if so,it will need to change a new heatplate.

#### The temperature is out of control: Set temperature 180°C (356°F), but the actual temperature is above 200°C(392°F)

- 1. It means the solid-state relay is broken, out of control, need to change a new relay.
- 2. Or the digital controller is faulty, need to change controller.

#### The print color is pale or faded image

The pressure is not high enough or The temperature is too low / pressing time is too short. Please adjust the pressure/ temperature or increase the heating time.

#### The print color is too Darkened, deep or blurred image

The temperature is too high / or pressing time is too long. Please adjust the temperature or reduce the heating time.

#### The print color is different/ partial transfer effect is not good enough

Pressing time is too short/ using poor quality transfer paper.

Please increase the heating time or use high quality transfer paper.

Fujian Aidary Applance Co.,Ltd



info@heatpresscn.com



No.318,Bailong Area, Minhou,Fuzhou,Fujian, China.350018



www.aidary.com



https://www.facebook.com/heatpresscn



http://www.youtube.com/user/heatpresscn







