

AIDARY

User manual
Heat Press Machine



HEAT PRESS MACHINE

User Manual


Introduction

A heat press machine is using temperature and pressure with a certain amount of time to transfer images on items, the transfer is permanently embedded into the product.

Package Contents

- 1 × Heat Press Machine
- 1 × User Manual

Product Structure

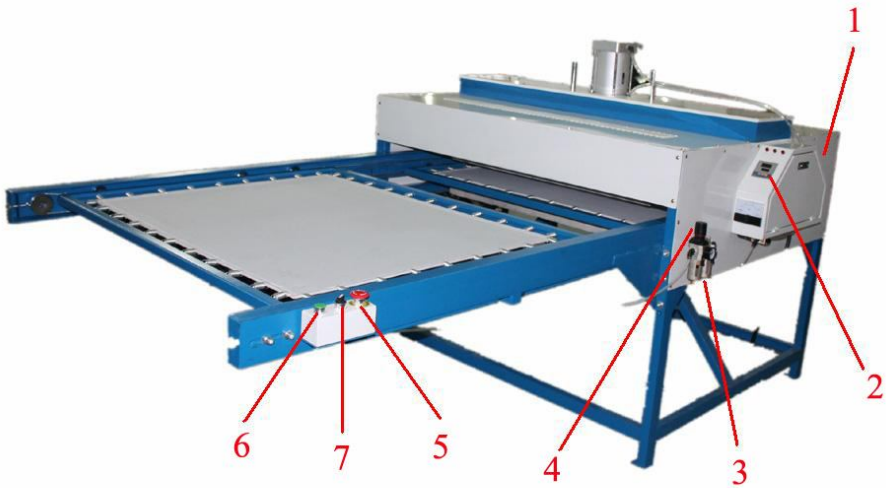

1. Power Switch	4. Cap of air regulator
2. LCD Controller	5. Emergency button
3. Air regulator	6. Start button
7. Heating Plate	8. Slide bottom Teflon sheet

1. Printing Methods

1. Make sure the power plug is well connected to the air switch, then press the power switch to turn on.
2. Hook up to air compressor, adjust the air regulator to 0.4-0.6 Mpa. (Pull up the cap of regulator before adjusting, press down the cap after finish adjusting)
3. Set the temperature and the time you want (See the temp&time setting sheet)
4. When the temperature reaches the setting temperature, place the object (e.g T-shirt) on press bed, and let the transfer paper upon the object.
5. Pull in the bottom sheet, press the start button, and starts to transfer.
6. When the scheduled time is up, the heating plate will lift up automatically, the transfer work is finished.
7. If meet some emergent situation, press the emergency button, the plate will lift up immediately.

2. Recommended Setting for the Object

SURFACE	PRESS TIME	TEMPERATURE	PRESSURE	TIPS
Fiber/Fabric/Polyster material	35-40 seconds	180°C(400 F)	40 PSI (Medium)	With sublimation paper
Pure cotton material	20-25 seconds	165°C-170°C	40 PSI (Medium)	With transfer paper
Mouse pad	25-30 seconds	180°C(400 F)	40 PSI (Medium)	With sublimation paper
Metal card /Aluminium card	20-25 seconds	180°C(400 F)	40 PSI (Medium)	With sublimation paper
These are approximate datas FYI				

3. Maintain Note:

1. Different item will require different temperature and time setting because the materials or thickness is different.
2. This machine is not suitable for children to use or for food processing.
3. Please turn off the machine and unplug the power cord when the machine is not in use.
4. The heat plate will automatically cool down to the room temperature if the heat press stays non-use for more than 30 minutes.
5. The heat-releasing fan will automatically starts when the temperature of heat plate reaches 80 °C (176 °F). It helps to reduce the temperature of electrical parts and prolong the service life of them

4.Troubleshooting:

No action after turn on the machine.

1. Check the plug whether it connects well or whether it is broken.
2. Check the fuse whether it has been burnt out.
3. Check the power switch or digital controller whether it is broken.

Indicating light is on but the display screen is black.

Check the 5 cable of railway transformer. The connection is poor if it is loose, just fix it. The transformer may be faulty if the cable is well connected just fix it.

The display screen is working well but the temperature is not heating up.

1. Check if the indicating light of solid-state relay is on, if not, please check whether the relay or digital controller is broken.
2. The heat platen still can't heating up if you already changed the new solid-state relay, please check whether the heat plate is faulty or the heat plate's power cable is loose, if so, it will need to change a new heatplate.

The temperature is out of control: Set temperature 180°C(356°F), but the actual temperature is above 200°C(392°F)

1. It means the solid-state relay is broken, out of control, need to change a new relay.
2. Or the digital controller is faulty, need to change controller.

The print color is pale or faded image

The pressure is not high enough or The temperature is too low / pressing time is too short. Please adjust the pressure/ temperature or increase the heating time.

The print color is too Darkened, deep or blurred image

The temperature is too high / or pressing time is too long. Please adjust the temperature or reduce the heating time.


The print color is different/ partial transfer effect is not good enough

Pressing time is too short/ using poor quality transfer paper. Please increase the heating time or use high quality transfer paper.

The transfer paper stick to the object after transfer

The temperature is too high / use poor quality printing transfer paper Please adjust the temperature or use high quality transfer paper.

Fujian Aidary Appliance Co.,Ltd

 info@heatpresscn.com

 www.aidary.com

 No.318,Bailong Area, Minhou,Fuzhou,Fujian, China.350018

 <https://www.facebook.com/heatpresscn>

 <http://www.youtube.com/user/heatpresscn>



RoHS
Made in China

